



HL4522 CVAP® HOLDING CABINET

EXCLUSIVE TECHNOLOGY

Exclusive Controlled Vapor technology (U.S. patent # 5,494,690) establishes that the water vapor content in the cabinet is the same as that of the food. This unique process controls moisture evaporation and saturation, so crisp foods stay crisp, and moist foods stay moist.

EASY-TO-USE CONTROLS

Electronic differential controls are easy to understand and reliable. Never requires field calibration.

FOOD TEMP DIAL allows precise control of food temperature from 90 to 180° F (32 to 82° C).

FOOD TEXTURE DIAL maintains just-cooked texture with settings labeled proof, very moist, firm moist, and crisp. No guesswork required.

DURABLE

Built to last with quality craftsmanship, high grade stainless steel construction and full insulation on top, sides and doors.

BETTER CONTROL OF FOOD QUALITY

Features radial fan for improved food quality with frequent door openings, full perimeter door gaskets, magnetic door handles, lift-off doors, removable side racks, and digital readout for water temperature.

INDUSTRY COMPLIANT

CVap equipment complies with domestic and international requirements such as UL, C-UL, UL Sanitation, CE, MEA, and others.



HL4522
CVAP® HOLDING CABINET
FULL SIZE MODEL, WITH FAN
Electronic Differential Control

CVap® Holding Cabinets are designed for high quality holding of a wide variety of menu items for extended times. They can be used for proofing, holding, and serving.



WINSTON INDUSTRIES, LLC.
2345 Carton Drive | Louisville, KY 40299 USA | www.winstonindustries.com
Phone: 1.800.234.5286 | 1.502.495.5400 | Fax: 1.502.495.5458
Specifications subject to change without notice.

JOB


ITEM#



HL4522 CVAP HOLDING CABINET

FULL SIZE MODEL, WITH FAN

Electronic differential control

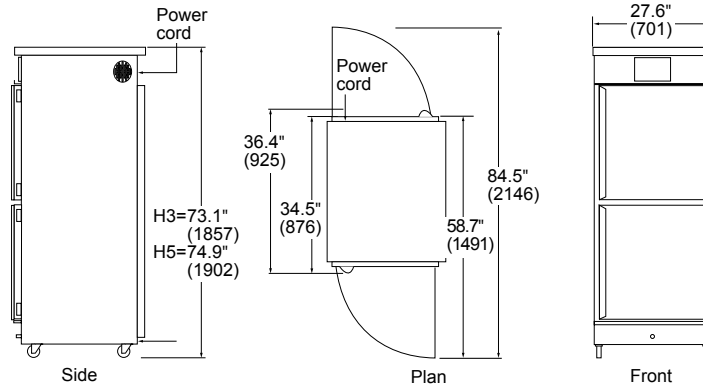

DRAWINGS NOT TO SCALE

capacity	size in (mm)	volts	hertz	ph	amps	watts	nema	ship wt. lb (kg)	ship cube
14 SP 28 STP 14 GP 2/1	H3= 73.1" (1857) H5= 74.9" (1902) HT= 75.7" (1923) W= 27.6" (701) WT= 29.5" (749) D= 34.5" (876) DT= 37.6" (955)	120	60	1	14.4	1730	US / CANADA US 5-15P CAN 5-20P	420 (191)	C3,5= 60 (1.7) CT= 73.9 (2.1)
							INTERNATIONAL <i>NOT AVAILABLE FOR INTERNATIONAL MARKET AT THIS TIME.</i>		

SP= Sheet pan (18" x 26" x 1.25") • STP= Steam table pan (12" x 20" x 2.5") • GP= Gastronorm pan • H3= Height w/3" casters • H5= Height w/ 5" casters
HT= Height w/ transport or bumper guard • WT= Width w/ transport or bumper guard • DT= Depth w/ transport or bumper guard

SHORT FORM SPECS

Shall be Winston CVap Holding Cabinet, model HL4522 with electronic A-Series differential controls to provide precise food temperature from 90 to 180° F (32 to 82° C) and maintain food texture with settings labeled proof, very moist, firm moist, and crisp. Utilizes Controlled Vapor Technology (patent #5,494,690) as a method and apparatus for holding hot foods, consisting of an air heater and water heater to establish ideal water vapor content that is in relation with the moistness characteristics of the food. Utilizes circulating fan to assist heat recovery.

CONSTRUCTION

MATERIALS: To be commercial and institutional grade stainless steel interior and exterior to provide ease of cleaning and long service life with reasonable use and care.

RACK SUPPORTS: Adjustable, normally spaced 3.5" (89 mm), to receive 14 sheet pans, 28 steam table pans, 14 2/1 gastronorm pans. Removable for easy cleaning.

DOORS: Field reversible hinges to allow door lift off to facilitate cleaning. Magnetic door handles.

CASTERS: Includes two locking, two non-locking, heavy duty, non-marking.

INSULATION: Full-perimeter.

CONTROLLER: Electronic differential control with dials labeled Food Temperature and Food Texture.

WATER FILL: Operated manually. Low mineral potable water is recommended, otherwise use deionizer/demineralizer to minimize corrosive damage.

VENTILATION: Allow 2" (51 mm) clearance on sides, particularly around ventilation holes. Install with supplied wheels, casters or legs. Refer to owner's manual for specific installation instructions. Generally this equipment doesn't need to be installed under a mechanical ventilation system (vent hood). Check local health and fire codes for requirements specific to your location.

ELECTRICAL: Supplied with 84" (2134 mm) (minimum) power cord and plug.

LOAD LIMIT: 65 lbs. (29.25 kg) per rack.

WARRANTY

Limited 1 year warranty (excluding gaskets, lamps, hoses, power cords, glass panels, and evaporators). Warranty disclaimer for failure to clean. Ask for complete warranty disclosure.

SPECIFY THE FOLLOWING WHEN ORDERING:

STANDARD (NO ADDITIONAL COST):

- Hinge preference: Left or right.
- Wheel/Caster/Leg preference: : Choice of 3" (76 mm) casters or 6" (152 mm) legs.

OPTIONAL (ADDITIONAL COST):

- Casters: 5" (127 mm) casters.
- Window: Window in doors.
- Bumper Guard: Full-perimeter bumpers with 5" (127 mm) casters (2 locking, 2 non-locking).
- Transport: Adds bumper guard base, cord wrap, evaporator cover, and push/pull handles.
- Solid rack supports: Solid stainless steel rack supports (replaces standard wire rack supports).
- Automatic water fill system.
- Extended Warranty: Adds parts and labor warranty coverage for one additional year.
- Any added options or accessories.

ACCESSORIES & SUPPLIES (ADDITIONAL COST)

PS2206-4	Wire rack/tray (4 - pack)
PS2553	8.5" (216 mm) Top cover extension
PS2351	11" (279 mm) Top cover extension
PS2696	Mobile water removal system
PS2980-1	One additional shelf rack (2 required)

**BUY WINSTON SERVICE PARTS, ACCESSORIES,
AND SUPPLIES ONLINE!**

FACTORY DIRECT AT WWW.WINSTONINDUSTRIES.COM



WINSTON INDUSTRIES, LLC.

2345 Carton Drive | Louisville, KY 40299 USA

Phone: 1.800.234.5286 | 1.502.495.5400 | Fax: 1.502.495.5458 | www.winstonindustries.com

Specifications subject to change without notice.

Copyright © 2012 | Printed in USA.

4272V098 rev26 | nr 03.24.15